


LED SOLAR PROJECTOR

Product&Family Code: 068 012 0025

TIGER-25

BLACK


Technical Drawing

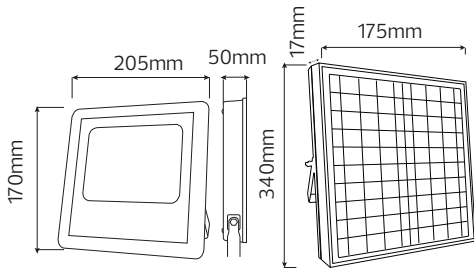

Technical Data

Voltage (V)	3.2V/5Ah x 1 Lithium Iron Phosphate
Product Wattage (W)	25
Colour Render Index (Ra)	>Ra70
Colour Temperature (K)	6400K
Materials	Aluminium DIE-Casting + Glass
Protection Class	III
Dimmable	No
EEI	A to A ⁺⁺
Warm-up time up to 60 %of the full light output	Instant Full Light
Luminous Flux (lm)	465
Charging Time (h) :	4-6 (Cloudy 1 day, Rainy 2 days)
Duration Time (hrs) ⏰	12-15H
Solar Panel	6V/12W(Polysilicon)
IP Rating	65
Beam Angle	120°
Remote Control	12m
Installation Height(m)	2-3
Charging&Discharging Time:	> 1500

Photometric Diagram

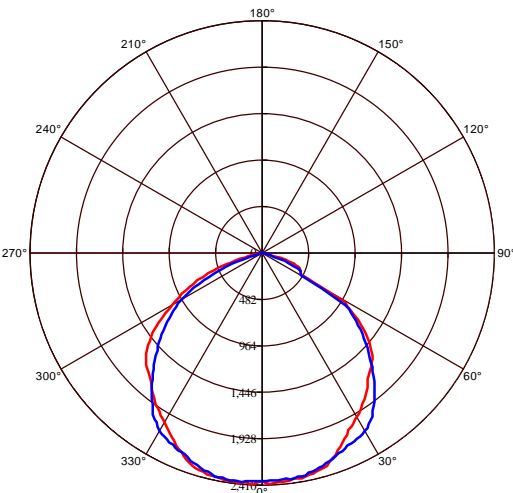

C0 Plane beam angle(50%):111.8(DEG) C90 Plane beam angle(50%):107.9(DEG)

Applications

- Outdoor applications.



Features

- High Lumen and CRI, Good quality & Constant Current driver.
- High heat dissipation, low carbon and environmental protection.
- SMD LED Lamp Base.
- Aluminum Body

